


TORQUE TEAM® WEDGE (ISO)

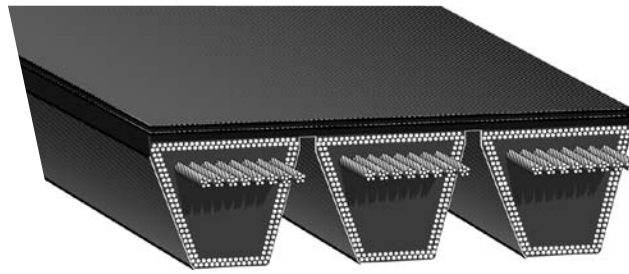

Part No: 3/SPB 3150

3/	3 ribs Joined Construction
SPB	16 mm top width
3150	3150 mm datum length
	Envelope Uncogged Construction Shown

APPLICATIONS

For shock load applications. Ideal for pulsating loads, high capacity drives and for short-center, heavy-duty drives.


KEY FEATURES & BENEFITS

- Narrow profile ribs provide savings through efficiency.
- Joined construction for problem drives.
- Strong Vytacord tensile members.
- Tough fabric backing.
- Oil, heat, ozone and abrasion resistant.
- Available in raw edge up to 3050mm length and envelope construction from 3060mm length.
- Matchmaker* to eliminate mismatch.
- Static conductive (ISO1813).

* Refer to Goodyear Matchmaker System (page 72)



ENVELOPE
CROSS SECTION



CUT EDGE
CROSS SECTION



CUT EDGE
SIDE VIEW

BANDED



TORQUE TEAM® WEDGE (ISO)

XPZ

Belt reference	No. Belts per sleeve	Width of sleeve (mm)	Belt reference	No. Belts per sleeve	Width of sleeve (mm)	Belt reference	No. Belts per sleeve	Width of sleeve (mm)
XPZ 1250	39	470	XPZ 1800	39	470	XPZ 2360	39	470
XPZ 1400	39	470	XPZ 1900	39	470	XPZ 2500	39	470
XPZ 1500	39	470	XPZ 2000	39	470	XPZ 2650	39	470
XPZ 1600	39	470	XPZ 2120	39	470	XPZ 2800	39	470
XPZ 1700	39	470	XPZ 2240	39	470	XPZ 3000	39	470

XPA/SPA

BANDED

Belt reference	No. Belts per sleeve	Width of sleeve (mm)	Belt reference	No. Belts per sleeve	Width of sleeve (mm)	Belt reference	No. Belts per sleeve	Width of sleeve (mm)
XPA 1250	31	470	XPA 2120	31	470	SPA 3350	34	515
XPA 1400	31	470	XPA 2240	31	470	SPA 3550	34	515
XPA 1500	31	470	XPA 2360	31	470	SPA 3750	34	515
XPA 1600	31	470	XPA 2500	31	470	SPA 4000	34	515
XPA 1700	31	470	XPA 2650	31	470	SPA 4250	34	515
XPA 1800	31	470	XPA 2800	31	470	SPA 4500	34	515
XPA 1900	31	470	XPA 3000	31	470			
XPA 2000	31	470	SPA 3150	34	515			

XPB/SPB

Belt reference	No. Belts per sleeve	Width of sleeve (mm)	Belt reference	No. Belts per sleeve	Width of sleeve (mm)	Belt reference	No. Belts per sleeve	Width of sleeve (mm)
XPB 2000	24	450	SPB 3350	21	450	SPB 5600	21	450
XPB 2120	24	450	SPB 3550	21	450	SPB 6000	21	450
XPB 2240	24	450	SPB 3750	21	450	SPB 6300	21	450
XPB 2360	24	450	SPB 4000	21	450	SPB 6700	21	450
XPB 2500	24	450	SPB 4250	21	450	SPB 7100	21	450
XPB 2650	24	450	SPB 4500	21	450	SPB 7500	21	450
XPB 2800	24	450	SPB 4750	21	450	SPB 8000	21	450
XPB 3000	24	450	SPB 5000	21	450			
SPB 3150	21	450	SPB 5300	21	450			

XPC/SPC

Belt reference	No. Belts per sleeve	Width of sleeve (mm)	Belt reference	No. Belts per sleeve	Width of sleeve (mm)	Belt reference	No. Belts per sleeve	Width of sleeve (mm)
XPC 3000	18	456	SPC 5000	15	380	SPC 8500	15	380
SPC 3150	15	380	SPC 5300	15	380	SPC 9000	15	380
SPC 3350	15	380	SPC 5600	15	380	SPC 9500	15	380
SPC 3550	15	380	SPC 6000	15	380	SPC 10000	15	380
SPC 3750	15	380	SPC 6300	15	380	SPC 11200	15	380
SPC 4000	15	380	SPC 6700	15	380	SPC 11800	15	380
SPC 4250	15	380	SPC 7100	15	380	SPC 12500	15	380
SPC 4500	15	380	SPC 7500	15	380			
SPC 4750	15	380	SPC 8000	15	380			

Cut belts available on request.
Goodyear reserves the right to change number of ribs. Please contact Goodyear PTP marketing.