




HY-T[®] TORQUE TEAM[®] (CLASSICAL)

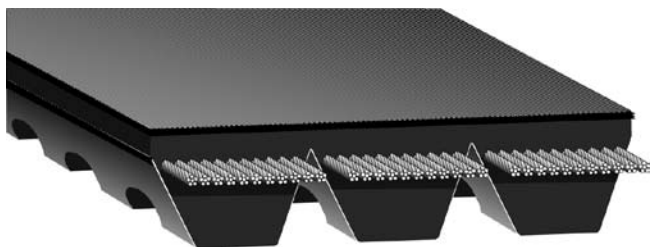

APPLICATIONS

For shock load applications. Ideal for pulsating loads, high-capacity drives and short center heavy-duty drives.

KEY FEATURES & BENEFITS

- Classical profile ribs.
- Joined construction for problem drives.
- High-strength Vytacord tensile members.
- Available in cut-edge (up to 112") or envelope construction (from 120" length) with PlioFlex cushion.
- Tough fabric backing.
- Oil, heat, ozone and abrasion resistant.
- Matchmaker* to eliminate mismatch.
- Static conductive (ISO1813).

Part No: 3/BX 112

3/ 3 ribs Joined Construction

B 17 mm top width – Classical Profile Rib

X Premium Cogged Construction

112 Approximate 112" Inside Length

Cut-Edge,
Molded Cog Construction Shown

BANDED

* Refer to Goodyear Matchmaker System (page 72)



ENVELOPE
CROSS SECTION



CUT-EDGE
CROSS SECTION



CUT-EDGE
SIDE VIEW

BX/B

Belt reference	Pitch length Lp (mm)	Belt reference	Pitch length Lp (mm)	Belt reference	Pitch length Lp (mm)	Belt reference	Pitch length Lp (mm)
BX35	935	BX62	1621	BX82	2129	B128	3297
BX38	1011	BX63	1646	BX83	2154	B133	3424
BX42	1113	BX64	1671	BX85	2205	B136	3500
BX43	1138	BX65	1697	BX87	2256	B144	3780
BX46	1214	BX66	1722	BX88	2281	B148	3805
BX48	1265	BX67	1748	BX90	2332	B158	4059
BX50	1316	BX68	1773	BX93	2408	B162	4161
BX51	1341	BX70	1824	BX95	2459	B173	4440
BX52	1367	BX71	1849	BX96	2484	B180	4618
BX53	1392	BX72	1875	BX97	2510	B195	4999
BX54	1417	BX73	1900	BX99	2560	B210	5380
BX55	1443	BX74	1925	BX100	2586	B225	5723
BX56	1468	BX75	1951	BX103	2662	B240	6104
BX57	1494	BX77	2002	BX105	2713	B255	6485
BX58	1519	BX78	2027	BX108	2789	B270	6866
BX59	1544	BX79	2052	BX112	2891	B300	7628
BX60	1570	BX80	2078	B120	3094	B315	8009
BX61	1595	BX81	2103	B124	3195		

HY-T[®] TORQUE TEAM[®] (CLASSICAL)

CX/C

Belt reference	Pitch length Lp (mm)	Belt reference	Pitch length Lp (mm)	Belt reference	Pitch length Lp (mm)	Belt reference	Pitch length Lp (mm)
CX60	1598	CX105	2741	C158	4087	C270	6881
CX68	1801	CX108	2817	C162	4188	C285	7262
CX75	1979	CX109	2842	C173	4468	C300	7643
CX81	2131	CX112	2918	C180	4646	C315	8024
CX85	2233	C120	3122	C195	5027	C330	8405
CX90	2360	C124	3223	C210	5408	C345	8786
CX96	2512	C128	3325	C225	5738	C360	9167
CX99	2588	C136	3528	C240	6119	C390	9929
CX100	2614	C144	3731	C255	6500	C420	10688

D

Belt reference	Pitch length Lp (mm)	Belt reference	Pitch length Lp (mm)	Belt reference	Pitch length Lp (mm)	Belt reference	Pitch length Lp (mm)
D120	3132	D210	5418	D315	8021	D480	12212
D144	3741	D225	5735	D330	8402	D540	13736
D158	4097	D240	6116	D345	8783	D600	15260
D162	4200	D255	6497	D360	9164	D660	16784
D173	4478	D270	6878	D390	9926		
D180	4656	D285	7259	D420	10688		
D195	5037	D300	7640	D450	11450		

BANDED